


半柔同轴电缆 Semi-Flexible coaxial cable series

SFX141LSZH-50

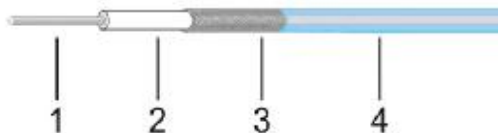

- 1.内导体 Inner Conductor 2.绝缘 Insulation
3.外导体 Outer Conductor 4.护套 Jacket

电缆结构/Construction

内导体 Inner Conductor	镀银铜线 SPC Wire	0.93±0.02
绝缘 Insulation	聚四氟乙烯 PTFE	3.00±0.05
外导体 Outer Conductor	镀锡铜线 TC Wire	3.52±0.05
护套 Jacket	低烟无卤 PE LSZH 蓝色	4.50±0.15

机械性能/Mechanical Characteristics

弯曲半径(mm) Bending Radius	单次 Single	8
	多次 Repeated	40
耐温等级 Temperature	℃	-55~+125

环境负荷物质应对情况/Environment-Friendliness

RoHS 指令/2011/65/EU	满足/ Compliant
--------------------	---------------

电气性能/Electrical Characteristics

特性阻抗/Impedance	Ω	50±2
电容/Capacitance	pF/m	95.1
传输速率 Propagation Velocity	%	70
连续工作电压 Continuously Operating Voltage	KV _{RMS}	1.9
延时 Signal Delay	ns/m	4.7
屏蔽衰减 Screening Effectiveness	dB	100
最高使用频率 Max. operating Frequency	GHz	34
驻波比 VSWR	0~3GHz	≤1.15
频率 Frequency	衰减 Attenuation@20℃ dB/m	功率容量 Power Rate @20℃,W
0.5GHz	0.26	436.5
1.0GHz	0.39	303.4
5.0GHz	0.92	126.7