


Customer: _____

Topsignal Type: SMT680-065F/12.5T

Customer P/N: _____

Specification No.: SR065F/12.5T-001

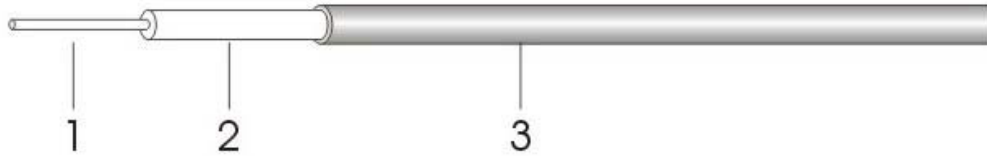

Construction Specification / 结构尺寸

Item/项目	Material/材料	Diameter/直径(mm)
1 . Inner conductor/内导体	Silver plated copper/镀银铜线	0.92±0.02
2 . Dielectric/绝缘	FEP/聚全氟乙丙烯	1.24±0.05
3 . Outer conductor/外导体	Tin plated seamless copper tube /镀锡无缝退火紫铜管	1.60±0.05

Electrical Characteristics/电气性能

Capacitance/电容(pF/m)	Nom. 390
Impedance/阻抗(ohm)	12.5
Velocity/速率(%)	69.5
Corona extinction voltage/灭晕电压(kVrms 50Hz)	0.5
Voltage withstanding/耐压(Vrms 50Hz/1 min.)	750
Cutoff frequency/截止频率 (GHz)	60

Mechanical and Environmental Characteristics/机械和环境性能

Operating temp./工作温度(°C)	-55 to 125
Min. bending radius static/最小弯曲半径, 单次(mm)	6.0
RoHS/RoHS环保	Compliant/符合

Attenuation @ 20°C and Sea Level,Power/海平面 20°C衰减, 功率

Frequency(GHz)	Attenuation(dB/m)	Average Power(W)
0.5	1.30	98.9
1.0	1.83	69.5
5.0	4.30	29.9