



High frequency probe GS(SG) configuration

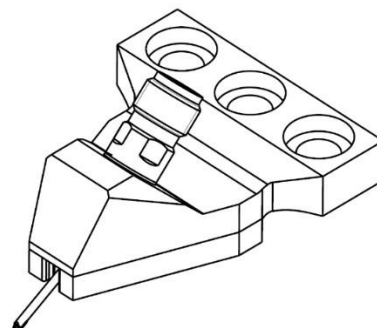

SG configuration

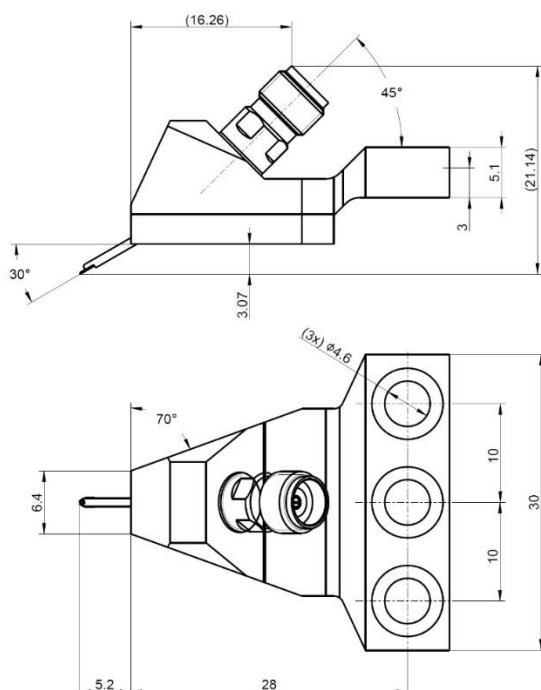

GS configuration

all the dimensions are in mm.

Configuration

Connector	2.92 female
Probe Material:	
-Probe tip	Nickel alloy, Gold plating (Au pads)
-Body	Aluminum Alloy
-Insulator	PEEK
Recommend Overtravel	50um~75um

Electrical Characteristics

Impedance	50 Ω
Frequency Range	DC to 40 GHz
Return Loss	>15 dB @ DC to 40 GHz, based on 100um pitch
Insertion Loss	<0.7 dB @ DC to 40 GHz, based on 100um pitch
Contact resistance	< 50 m Ω , Au pads; < 75 m Ω , Al pads

Environment Data

Working Temperature	-45°C to +85°C
RoHS	Compliant

Order Information

P/N	Description
2.92-A-GS-125	45 Angle GS Probe, GS configuration, 125 um pitch, DC to 40GHz
2.92-A-SG-125	45 Angle SG Probe, SG configuration, 125 um pitch, DC to 40GHz