


High frequency probe 40GHz,150um pitch, GSG configuration

2.92-K-GSG-150-A

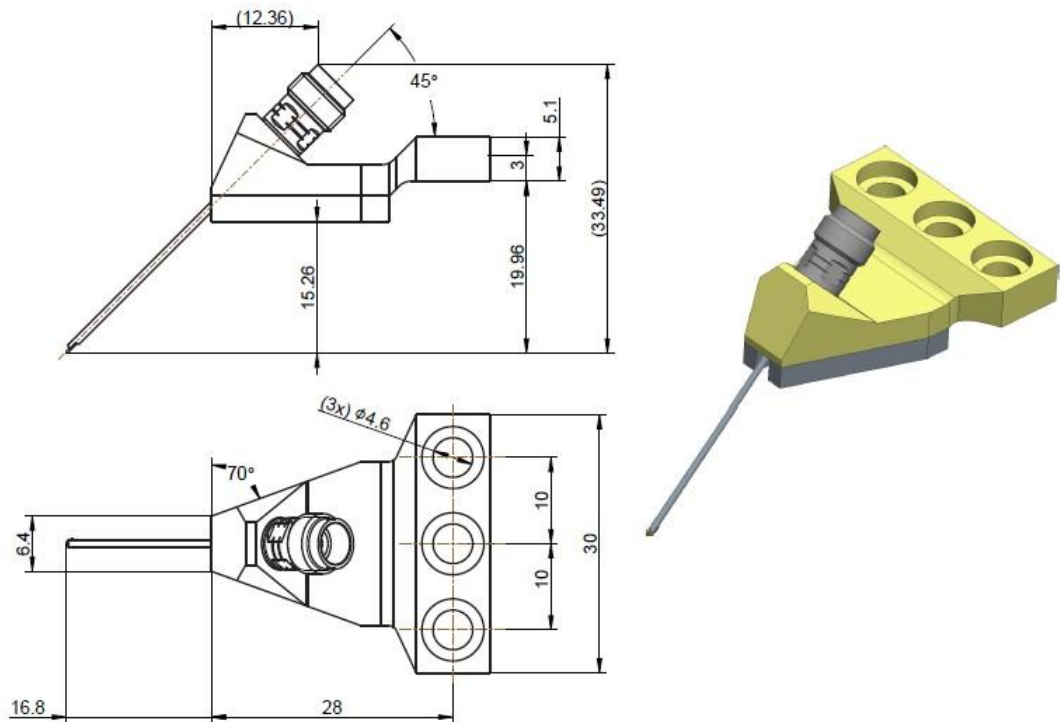

- all the dimensions are in mm. Tolerance: +/-0.25

Configuration

Connector	2.92 female
Probe Material:	
-Probe tip	BeCu, Gold plating
-Body	Aluminum Alloy
Probe tip width	30um
Overtravel	50um~75um

Electrical Characteristics

Impedance	50 Ω
Frequency Range	DC to 40 GHz
Return Loss	>15 dB @ DC to 40 GHz;
Insertion Loss	<1.5 dB @ DC to 40 GHz

Environment Data

Working Temperature	-45℃ to +85℃
RoHS	Compliant

Order Information

P/N	Description
2.92-K-GSG-150	45 Angle GSG Probe, 150um pitch, DC to 40 GHz