


DC-BLOCK-2.4-JK

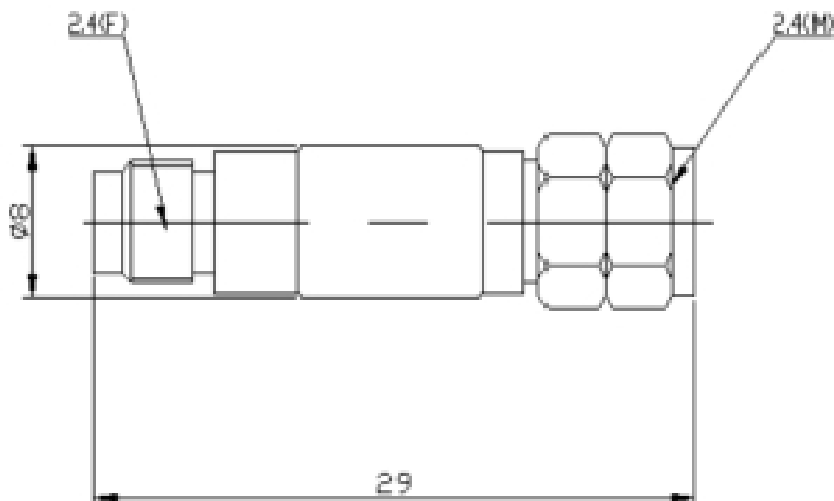

Configuration

Connector 1 Type	2.4mm Female
Connector 2 Type	2.4mm Male
Connector Body	Stainless Steel (SUS303), Passivation
DC Block Body	Aluminium Alloy/Passivation

Electrical Characteristics

Impedance	50 Ω
Frequency Range	50GHz
VSWR	≤ 1.55 , DC to 50GHz
Insertion Loss	$\leq 1.0\text{dB}$, DC to 50GHz
DC Voltage	50V

Mechanical Properties

Dimensions	$\varnothing 8 \times 29\text{mm}$
Weight	15g

Environment Data

Working Temperature	-55 $^{\circ}\text{C}$ ~ +100 $^{\circ}\text{C}$
---------------------	--

Order Information

P/N DC-	Description
BLOCK-2.4-JK	DC Block, 2.4(F)/2.4(M),50V DC,50GHz