


DC-BLOCK-2.92-JK/XN

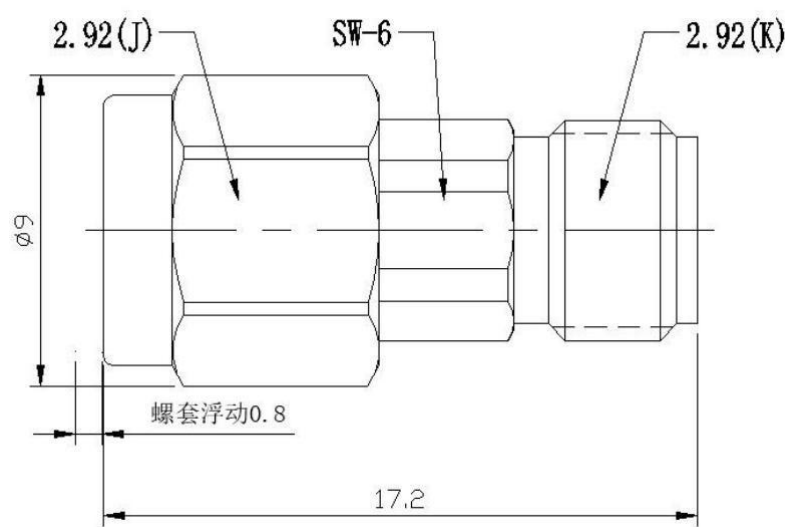

Configuration

Connector Body	Stainless Steel (SUS303), Passivation
Connector Conductor	Beryllium Copper, Gold
Impedance	50Ω
Temperature Range	-55°C ~ +125°C
Connector Type	2.92(M) to 2.92(F)
Dimensions	Ø9×17.2mm
Weight	3g

Performance Index

Dloorplr P/N	Frequency Range	Insertion Loss (dB)	VSWR	DC Voltage(V)
DC-BLOCK-2.92-JK/XN	10MHz~40GHz	≤0.5	1.3	63