


RA03A2-1.85-67

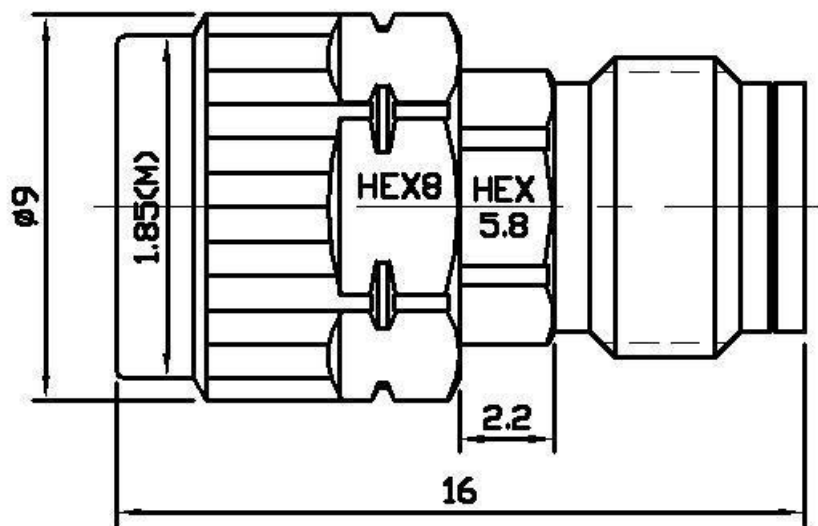

Configuration

Connector Body	Stainless Steel (SUS303), Passivation
OuterSheel	Aluminum, Cleaning
Impedance	50Ω
Average Power	2W
Attenuation value	30+2/-1dB
Temperature Range	-55°C ~ +125°C
Connector Type	1.85mm (Male&Female)
Dimensions	Ø9×16mm
Weight	3.5g

Performance Index

P/N	Frequency Range (GHz)	Attenuation value and degree of accuracy				VSWR
		1-9dB	10dB	20dB	30dB	
RA03A2-1.85-67	DC-67 GHz	-1.0/+1.5	-1.0/+1.5	-1.0/+2.0	-1.0/+2.0	≤1.50