


RA2.92-JK-40-20W

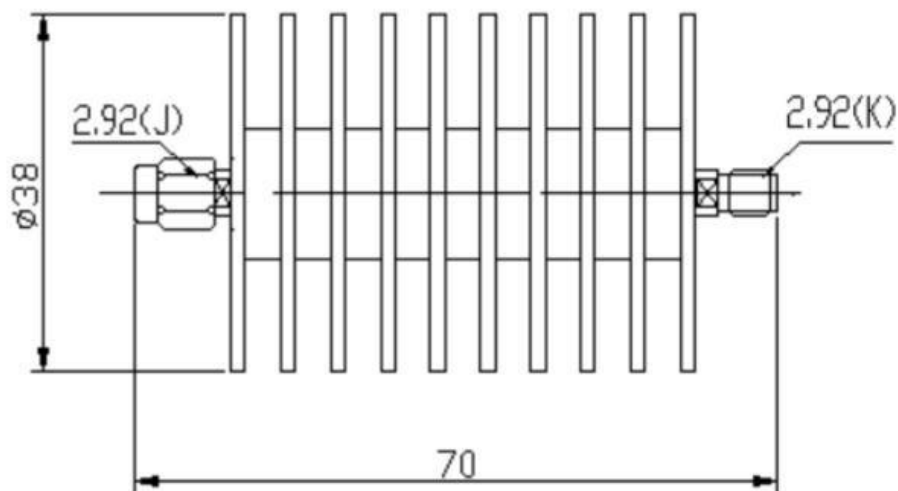

Configuration

Connector Body	Stainless Steel (SUS303), Passivation
Product Body	Aluminium, Black anodizing
Connector Conductor	Beryllium Copper, Gold
Impedance	50Ω
Average Power	20W
Temperature Range	-55°C ~ +125°C
Connector Type	2.92(F) to 2.92(M)
Dimensions	Ø38×70mm
Weight	≈ 75g

Performance Index

P/N	Frequency Range (GHz)	Attenuation value and degree of accuracy				VSWR
		10dB	20dB	30dB	40dB	
RA2.92-JK-40-20W	DC-40 GHz	+2/-2	+2/-2	+2/-2	+2.5/-2	≤1.35