


RASMA-JK-18-20W

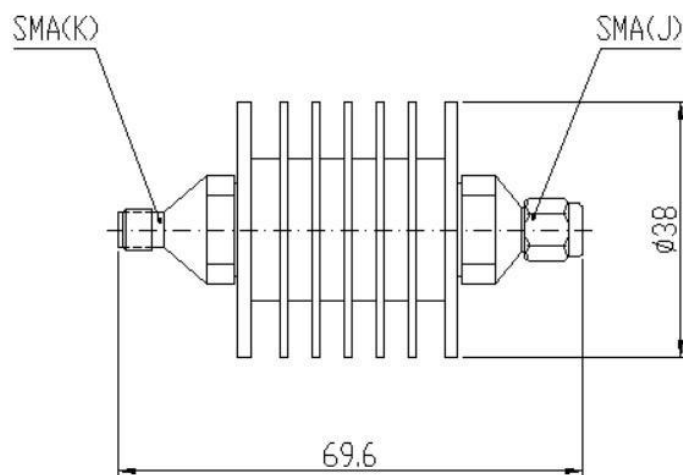

Configuration

Connector Body	Stainless Steel (SUS303), Passivation
Product Body	Aluminium, Black anodizing
Connector Conductor	Beryllium Copper, Gold
Impedance	50 Ω
Average Power	20W
Temperature Range	-55°C ~ +125°C
Connector Type	SMA(F) to SMA(M)
Dimensions	Ø38×69.6mm
Weight	≈ 75g

Performance Index

P/N	Frequency Range (GHz)	Attenuation value and degree of accuracy					VSWR
		6dB	10dB	20dB	30dB	40dB	
RASMA-JK-18-20W	DC-18 GHz	±1	±1.2	±1.2	±1.2	±1.2	≤1.45