


# Multi-coaxial Cable Assembly Datasheet



## RCBJ-BJ08-xxxS-4YE

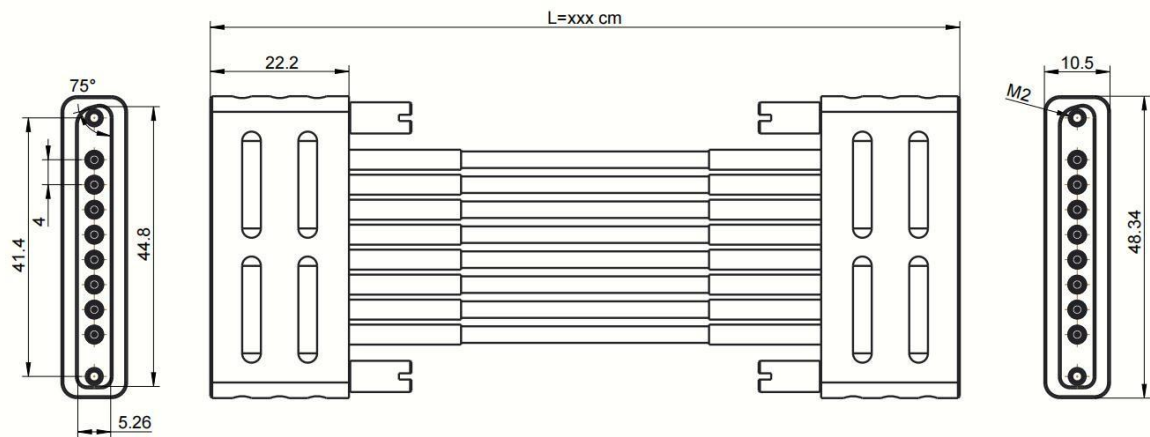

### Configuration

Connector 1 Type	MiniSMP Female
Connector 2 Type	MiniSMP Female
Connector Body	Aluminum Alloy/Anodizing
Cable Type	Low Loss Stable Phase
Cable Diameter	2.3mm

### Electrical Characteristics

Impedance	50Ω
Frequency Range	DC to 40GHz
Return Loss	≤14dB
Insertion Loss	≤0.052dB/cm x Length (cm)+1.2dB, DC to 40GHz
Different cable phase match	±8 Degree Max

### Mechanical Properties

Mechanical Life	MiniSMP Female 100 cycles
-----------------	---------------------------

### Environment Data

Working Temperature	-40℃ to +85℃
---------------------	--------------

# Multi-coaxial Cable Assembly Datasheet



## Order Information

P/N	Description
RCBJ-BJ08-030S-4YE	Multi-coaxial Cable Assembly, MiniSMP(F) breakout to MiniSMP(F),1x8, DC to 40GHz, length 30cm
RCBJ-BJ08-060S-4YE	Multi-coaxial Cable Assembly, MiniSMP(F) breakout to MiniSMP(F),1x8, DC to 40GHz, length 60cm
RCBJ-BJ08-xxxS-4YE	Multi-coaxial Cable Assembly, MiniSMP(F) breakout to MiniSMP(F),1x8, DC to 40GHz, length xxx cm

## Product 3D View

