


Multi-coaxial Cable Assembly Datasheet



RGHD-SD16-xxxS-5NC

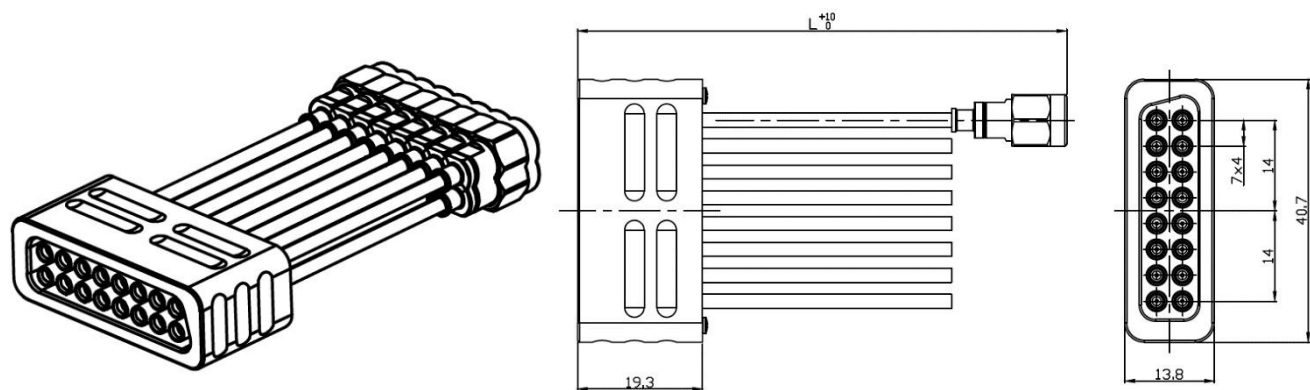

Configuration

Connector 1 Type	HS40 Female
Connector 2 Type	2.4mm Male
Connector Body	Aluminium Alloy/Anodizing
Cable Type	Low Loss Stable Phase
Cable Diameter	2.65mm

Electrical Characteristics

Impedance	50Ω
Frequency Range	DC to 50GHz
Return Loss	≥15dB, DC to 50GHz
Insertion Loss	≤8.5/1000*L+0.3dB, DC to 50GHz
Phase Mating	±2ps

Mechanical Properties

Mechanical Life	500 cycles
Mating Force (Per single channel)	3.5N Max.
Demating Force (Per single channel)	3.5N Max.

Environment Data

Working Temperature	-40℃ ~ +85℃
---------------------	-------------

Order Information

P/N	Description
RGHD-SD16-015S-5NC	Multi-coaxial Cable Assembly,HS40(F) breakout to 2.4(M),2x8, 2.65mm,length 15cm
RGHD-SD16-030S-5NC	Multi-coaxial Cable Assembly,HS40(F) breakout to 2.4(M),2x8, 2.65mm,length 30cm
RGHD-SD16-xxxS-5NC	Multi-coaxial Cable Assembly,HS40(F) breakout to 2.4(M),2x8, 2.65mm,length xxxcm