


Multi-coaxial Cable Assembly Datasheet

RCBS-HD08-xxxS-4YE2

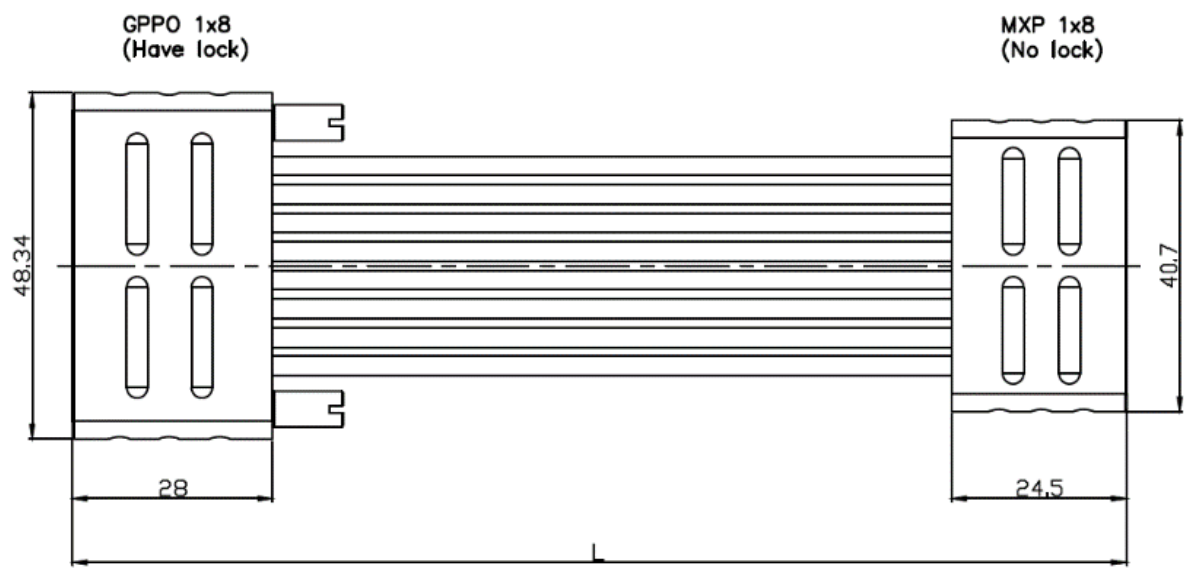

Configuration

Connector 1 Type	GPPOFemale
Connector 2 Type	HS40Female
Connector Body	Aluminium Alloy/Anodizing
Cable Type	Low Loss Stable Phase
Cable Diameter	2.3mm

Electrical Characteristics

Impedance	50Ω
Frequency Range	DC to 40GHz
Return Loss	≥14dB, DC to 40GHz
Insertion Loss	≤5.1/1000*L+1.0dB, DC to 40GHz
Phase Mating	±2ps

Mechanical Properties

Mechanical Life	500 cycles
Mating Force (Per single channel)	3.5N Max.
Demating Force (Per single channel)	3.5N Max.

Environment Data

Working Temperature	-55℃ ~ +125℃
---------------------	--------------

Multi-coaxial Cable Assembly Datasheet


CableChart

Connector 1	CableLabel	Cable Chart	CableLabel (Q-DD MCB)	Connector 2
GPPO TX1-4	TX1P		TX3P 斜角	HS40 1x8 U3
	TX1N		TX3N	
	TX2P		TX1P	
	TX2N		TX1N	
	TX3N		TX7P	
	TX3P		TX7N	
	TX4N		TX5P	
	TX4P		TX5N	
GPPO TX5-8	TX5P		TX6P 斜角	HS40 1x8 U5
	TX5N		TX6N	
	TX6P		TX8N	
	TX6N		TX8P	
	TX7N		TX2N	
	TX7P		TX2P	
	TX8N		TX4N	
	TX8P		TX4P	
GPPO RX1-4	RX1P		RX6N 斜角	HS40 1x8 U6
	RX1N		RX6P	
	RX2P		RX8N	
	RX2N		RX8P	
	RX3N		RX2N	
	RX3P		RX2P	
	RX4N		RX4N	
	RX4P		RX4P	
GPPO RX5-8	RX5P		RX3P 斜角	HS40 1x8 U4
	RX5N		RX3N	
	RX6P		RX1P	
	RX6N		RX1N	
	RX7N		RX7P	
	RX7P		RX7N	
	RX8N		RX5N	
	RX8P		RX5P	


Order Information

P/N	Description
RCHS-HD08-080S-4YE2	Multi-coaxial Cable Assembly,GPPO(F) to HS40(F),1x8,2.3mm,80cm
RCHS-HD08-xxxS-4YE2	Multi-coaxial Cable Assembly,GPPO(F) to HS40(F),1x8,2.3mm,xxxcm

Multi-coaxial Cable Assembly Datasheet

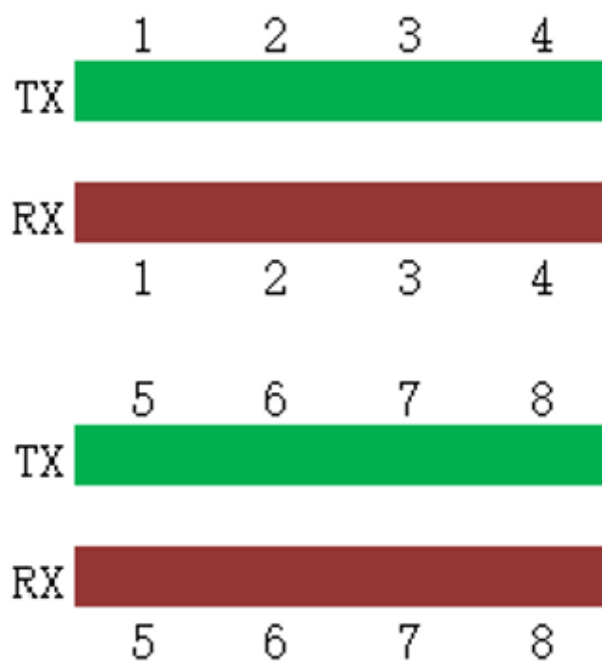

1x8 转接面板

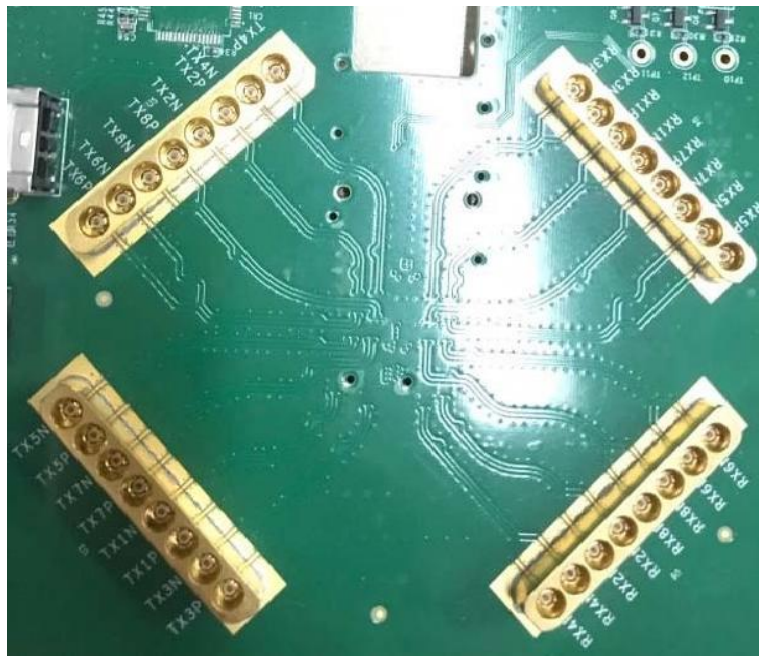

Q-DD MCB 夹具板