


RCHS-SD08-xxxS-6YB

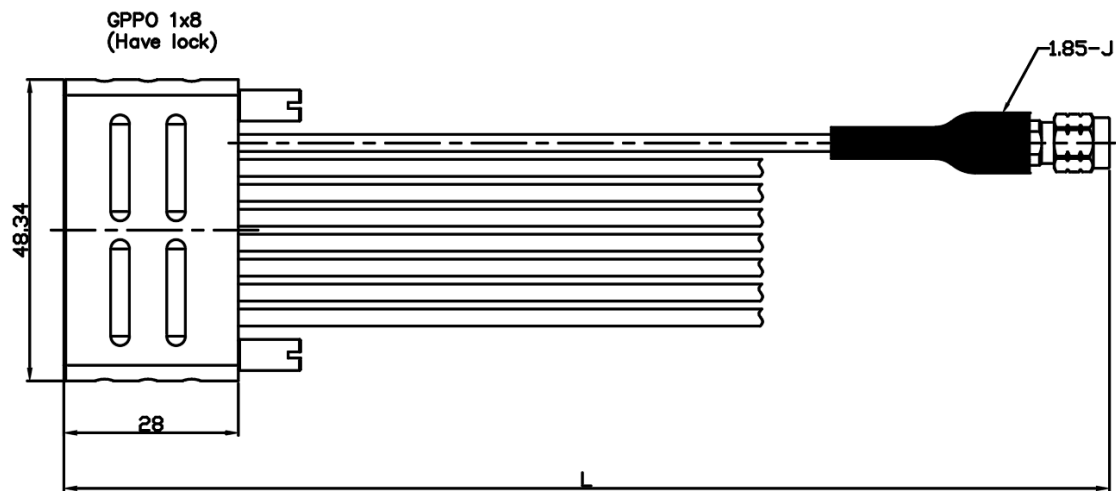

Configuration

Connector 1 Type	GPPO Female (Have Lock)
Connector 2 Type	1.85mm Male
Connector Body	Aluminum Alloy/Anodizing
Cable Type	Low Loss Stable Phase
Cable Diameter	2.40mm

Electrical Characteristics

Impedance	50Ω
Frequency Range	DC to 67GHz
Return Loss	≥14dB, DC to 67GHz
Insertion Loss	≤5.95/1000*L+1.5dB, DC to 67GHz
Phase Mating	±2ps

Mechanical Properties

Mechanical Life	500 cycles
Mating Force (Per single channel)	3.5N Max.
Demating Force (Per single channel)	3.5N Max.

Environment Data

Working Temperature	-40℃ ~ +85℃
---------------------	-------------

Order Information

P/N	Description
RCHS-SD08-015S-6YB	Multi-coaxial Cable Assembly, GPPO(F) breakout to 1.85(M),1x8,2.40mm,15cm
RCHS-SD08-030S-6YB	Multi-coaxial Cable Assembly, GPPO(F) breakout to 1.85(M),1x8,2.40mm,30cm
RCHS-SD08-xxxS-6YB	Multi-coaxial Cable Assembly, GPPO(F) breakout to 1.85(M),1x8,2.40mm,xxxxcm