


RCKL-SD08-xxxS-5YA

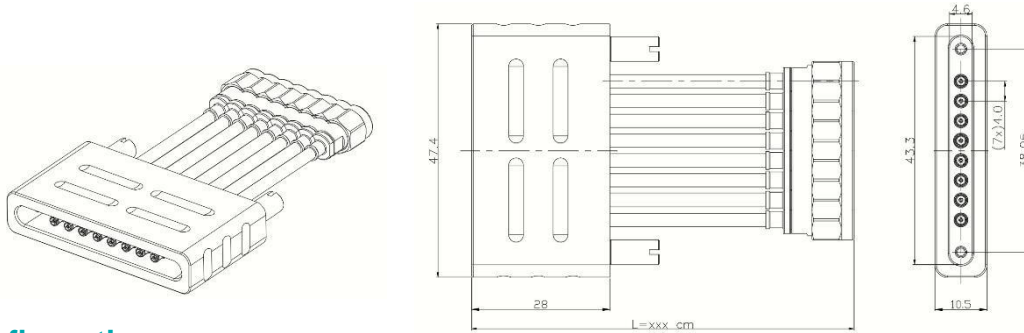

Configuration

Connector 1 Type	GPPO Female
Connector 2 Type	2.4mm Male
Connector Body 1	Aluminum Alloy/Anodizing
Connector Body 2	Stainless steel (SUS303), Passivation
Cable Type	Low Loss Stable Phase
Cable Diameter	2.3mm

Electrical Characteristics

Impedance	50Ω
Frequency Range	DC to 50GHz
Return Loss	TBD
Insertion Loss	≤0.06dB/cm x Length (cm)+1.4dB, DC to 50GHz
Phase Mating	±8 Degree Max

Mechanical Properties

Mechanical Life	GPPO Female 100 cycles, 2.4 Male 500 cycles
Mating Force (Per single channel)	3.5N Max.
De-mating Force (Per single channel)	3.5N Max.

Environment Data

Working Temperature	-40℃ to +125℃
---------------------	---------------

Order Information

P/N	Description
RCKL-SD08-020S-4YA	Multi-coaxial Cable Assembly, GPPO(Female) breakout to 2.4(male),1x8 channel, DC to 50GHz, length 20cm
RCKL-SD08-030S-4YA	Multi-coaxial Cable Assembly, GPPO(Female) breakout to 2.4 (male),1x8, channel, DC to 50GHz, length 30cm
RCKL-SD08-xxxS-4YA	Multi-coaxial Cable Assembly, GPPO(Female) breakout to 2.4 (male),1x8, channel, DC to 50GHz, length xxx cm