


Multi-coaxial Cable Assembly Datasheet



RCM7-M716-xxxS-6NA

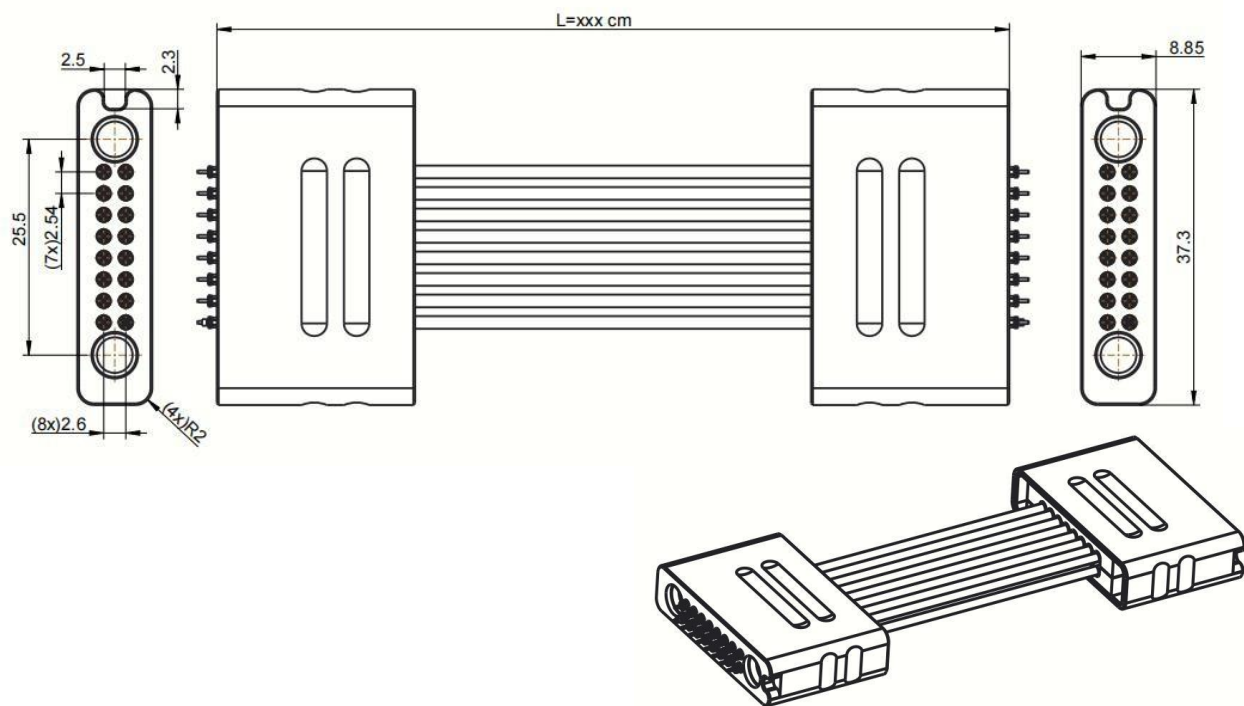

Configuration

Connector Type	SLC70 Male, a cc.to Dloorplf internal interface
Connector Body	Aluminum Alloy/Anodizing
Cable Type	Low Loss Stable Phase
Cable Diameter	1.6mm

Electrical Characteristics

Impedance	50Ω
Frequency Range	DC to 67GHz
Return Loss	TBD
Insertion Loss	≤0.2dB/cm x Length (cm)+1.6dB, DC to 67GHz
Different Cable Phase Match	±8 Degree Max

Mechanical Properties

Mechanical Life	SLC70 Male 500 cycles
-----------------	-----------------------

Environment Data

Working Temperature	-40℃ to +125℃
---------------------	---------------

Multi-coaxial Cable Assembly Datasheet



Order Information

P/N	Description
RCM7-M716-020S-6NA	Multi-coaxial Cable Assembly, SLC70(M) breakout to SLC70(M),2x8, DC to 67GHz, length 20cm
RCM7-M716-030S-6NA	Multi-coaxial Cable Assembly, SLC70(M) breakout to SLC70(M),2x8, DC to 67GHz, length 30cm
RCM7-M716-xxxS-6NA	Multi-coaxial Cable Assembly, SLC70(M) breakout to SLC70(M),2x8, DC to 67GHz, length xxx cm