


1x8 Multi-channels cable assembly  
SLC90, magnet type series



RCM9-SW08-xxxS-9N

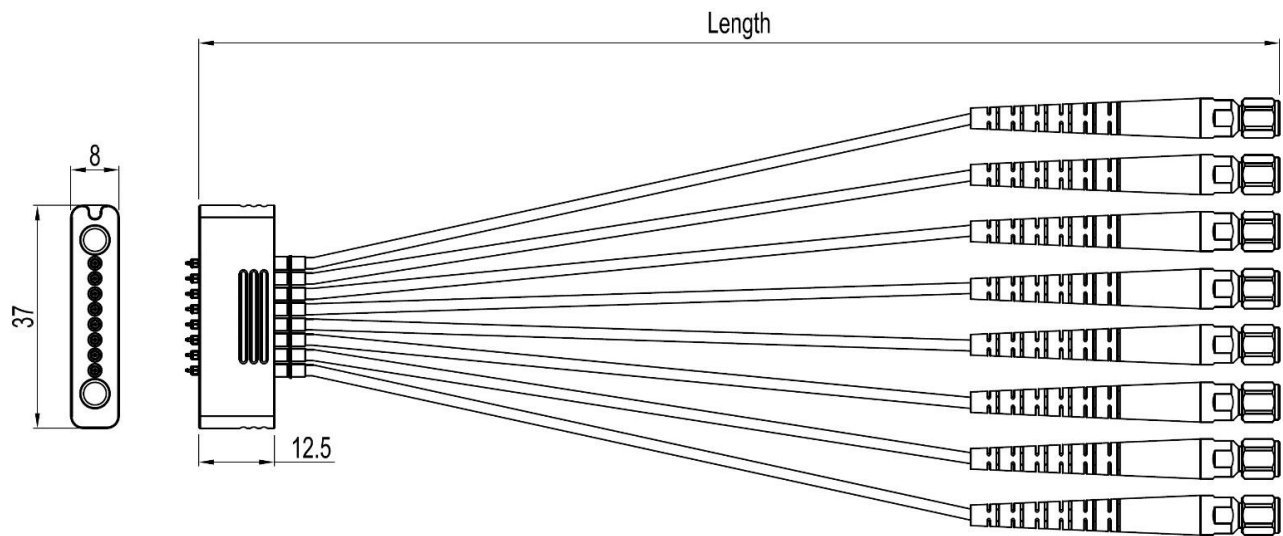

\*Dimensions in mm

Configuration

1x8 Multi-channels type	SLC90, Dloorplf interface
Connector type	1.0 Male
Connector Body	Aluminum Alloy/Anodizing
Cable Type	Low Loss Stable Phase
Cable Diameter	1.8 mm

Electrical Characteristics

Impedance	50Ω
Frequency Range	DC to 90 GHz
Insertion Loss	≤0.5dB+0.12 dB x L (cm), DC to 90 GHz
Return Loss	≤1.5, @ DC to 90 GHz
Phase Mating	± 8°

Mechanical Properties

Mating cycles	500 cycles
---------------	------------

Environment Data

Working Temperature	-45℃ to ~+85℃
---------------------	---------------

Order Information

P/N	Description
RCM9-SW08-xxxS-9N	SLC 90 magnet type, 1x8 Multi-channels cable assembly to 1.0 male, DC to 90 GHz, Length xxx cm
RCM9-SW08-030S-9N	SLC 90 magnet type, 1x8 Multi-channels cable assembly to 1.0 male, DC to 90 GHz, Length 30 cm