


RL1.85-J-67

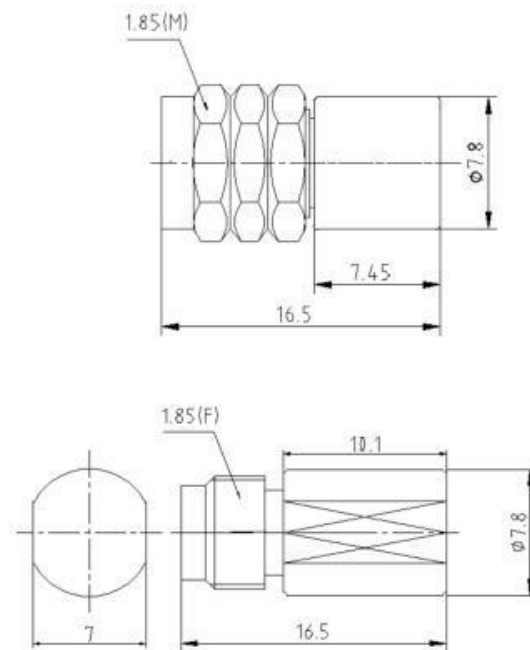

Configuration

Connector Body	Stainless Steel (SUS303), Passivation
OuterSheel	Copper plated gold
Impedance	50Ω
Average Power	2W
Temperature Range	-55°C~+125°C
Connector Type	1.85mm (Male)
Dimensions	M:Ø7.8×16.5mm F: Ø7.8×16.5mm
Weight	5g

Performance Index

Product P/N	Frequency Range (GHz)	Maximum VSWR
RL1.85-J-67	DC-67 GHz	1.45