


RL2.4-J-2

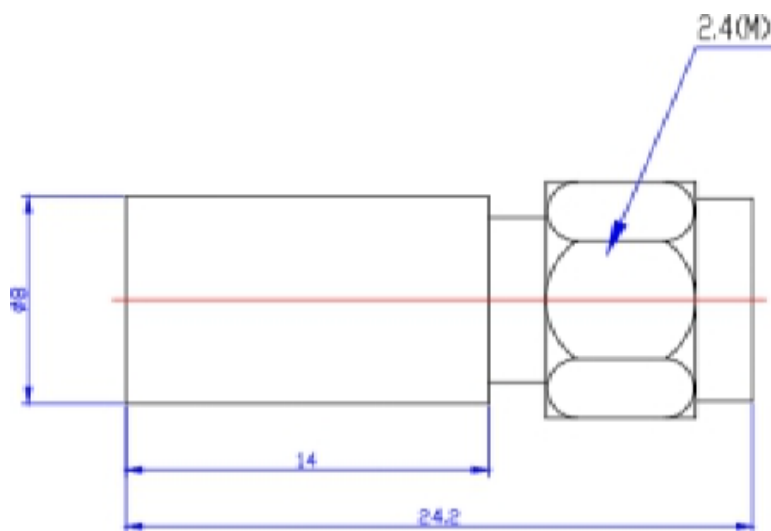

Configuration

Connector Body	Stainless Steel (SUS303), Passivation
Outer Sheel	Aluminum, Black Oxidation
Impedance	50Ω
Average Power	2W
Temperature Range	-55°C ~ +85°C
Connector Type	2.4mm (Male)
Dimensions	Ø8×24.2mm
Weight	5g

Performance Index

Product P/N	Frequency Range (GHz)	Maximum VSWR
RL2.4-J-2	DC-50 GHz	1.5