


2.92 Male Termination

RL2.92-J-40-2W

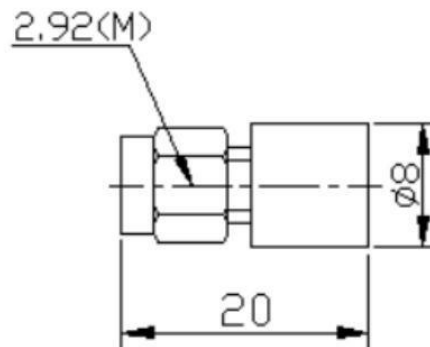

Configuration

Connector type	2.92 Male
Connector Material:	
-Outer contact	SUS303,Passivation
-Insulator	PTFE
-Center contact	CuBe, Gold plating

Electrical Characteristics

Impedance	50 Ω
Frequency Range	DC to 40 GHz
VSWR	≤ 1.35 , DC to 40 GHz

Mechanical Properties

Mechanical Life	100 cycles
-----------------	------------

Environment Data

Working Temperature	-55 $^{\circ}$ C to + 125 $^{\circ}$ C
RoHS	Compliant

Order Information

P/N	Description
RL2.92-J-40-2W	50 Ohm 2.92 male termination, 2.0W, DC to 40GHz