


RLMMPX-J-26-05W

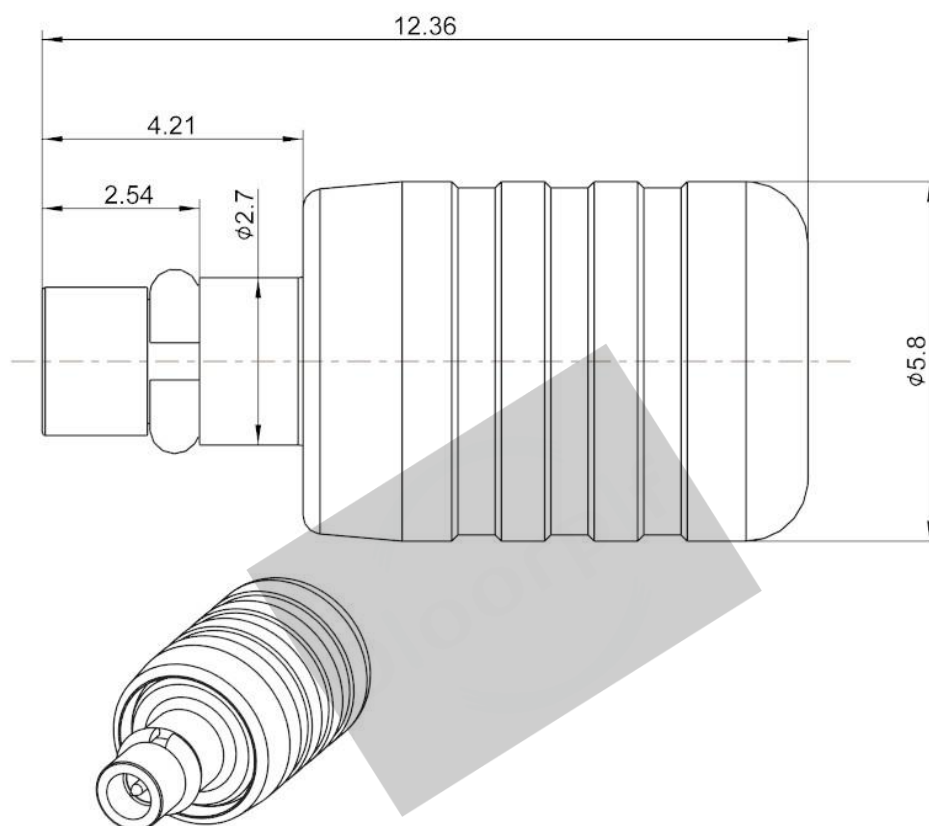

All dimensions are in mm; tolerances according to ISO 2768 m-H

Configuration

Connector type	MMPX male
Connector Material:	
-Outer contact	Brass, Gold plating
-Center contact	CuBe, Gold plating
-Insulator	PTFE
-Resistor	Al_2O_3

Electrical Characteristics

Impedance	50 Ω
Frequency Range	DC to 26.5 GHz
VSWR	≤ 1.35 , DC to 26.5 GHz (design value)
Insertion Loss	0.5 Watt average power up to 55 °C ambient temperature, linearly derated to 0.2 Watt at 85 °C ambient temperature.

MMPX male Termination



Mechanical Properties

Mechanical Life	100 cycles
-----------------	------------

Environment Data

Working Temperature	-20℃ to + 85℃
RoHS	Compliant

Order Information

P/N	Description
RLMMPX-J-26-05W	50Ohm MMPX male termination, 0.5W, DC to 26.5GHz