


RLSMA-J-16-6

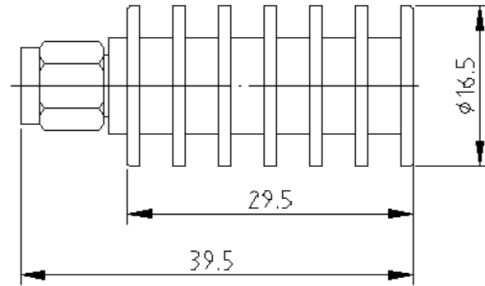

Configuration

Connector housing	Nickel plating on brass
Product surface treatment	Aluminum case, black oxidation
Nominal impedance	50Ω
Average power	16W
Peak Power	0.5KW
Temperature Range	-55°C ~ +125°C
Connector Type	SMA (Male)
Dimensions	Ø16.5×39.5mm
Weight	10g

Performance index

Product model	Frequency range (GHz)	Maximum VSWR
RLSMA-J-16-6	DC-6 GHz	1.2

Power/Temperature Ratio Curve

