


RLSMA-J-20-6

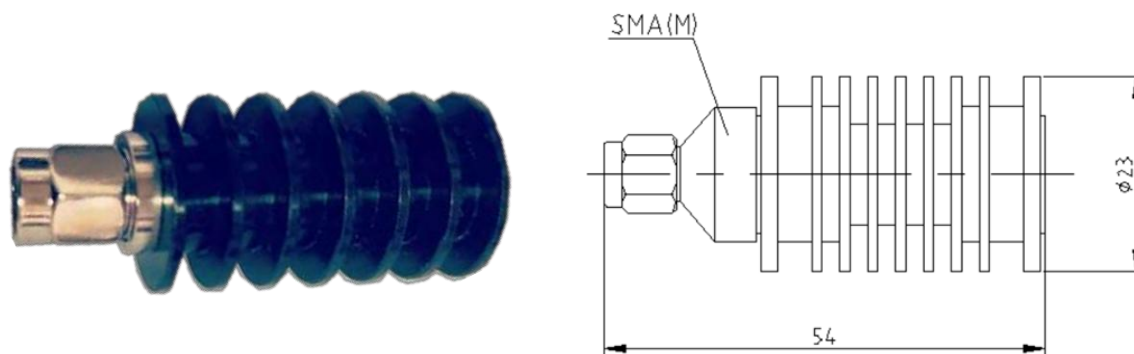

Configuration

Connector Body	Brass, Ni Plating Over All
Outer Sheel	Aluminum, Black Oxidation
Impedance	50Ω
Average Power	20W
Peak Power	0.5KW
Temperature Range	-55°C ~ +125°C
Connector Type	SMA (Male)
Dimensions	Ø23×54mm
Weight	40g

Performance Index

Product P/N	Frequency Range (GHz)	Maximum VSWR
RLSMA-J-20-6	DC-6 GHz	1.25

Power/Temperature Ratio Curve

