


## RLSMA-J-2-26.5

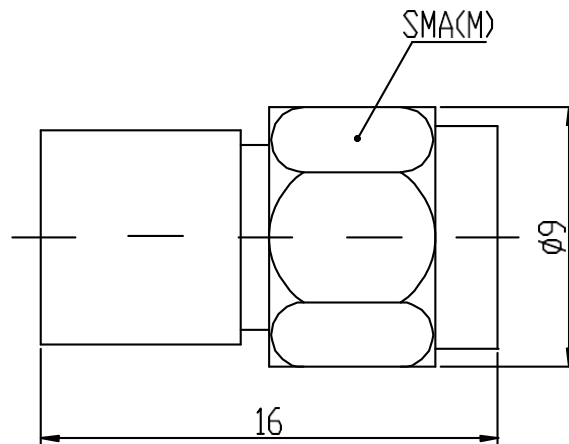

### Configuration

Connector type	SMA male
Connector Material:	
-Outer contact	Brass, Nickel plating
-Center contact	CuBe, Gold plating

### Electrical Characteristics

Impedance	50 $\Omega$
Frequency Range	DC to 26.5 GHz
VSWR	$\leq 1.45$ , DC to 26.5 GHz
Insertion Loss	2.0 Watt average power up to 55 °C ambient temperature, linearly derated to 1 Watt at 85 °C ambient temperature.

### Mechanical Properties

Mechanical Life	100 cycles
-----------------	------------

### Environment Data

Working Temperature	-20°C to + 85°C
RoHS	Compliant

### Order Information

P/N	Description
RLSMA-J-2-26.5	50Ohm SMA male termination, 2.0W, DC to 26.5GHz