


RLSMP-K-26

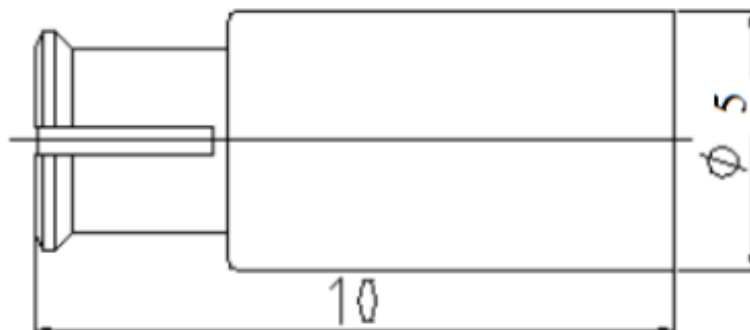

Configuration

Connector Body	Beryllium copper gold plating
OuterSheel	Copper gold plating
Impedance	50Ω
Average Power	2W
Temperature Range	-55°C ~ +125°C
Connector Type	SMP
Dimensions	K Ø4×10mm
Weight	4g

Performance Index

Product P/N	Frequency Range (GHz)	Maximum VSWR
RLSMP-K-26	DC-26.5 GHz	1.35