


Coaxial Switch Datasheet

SWH-1P4/6T-40-xNT

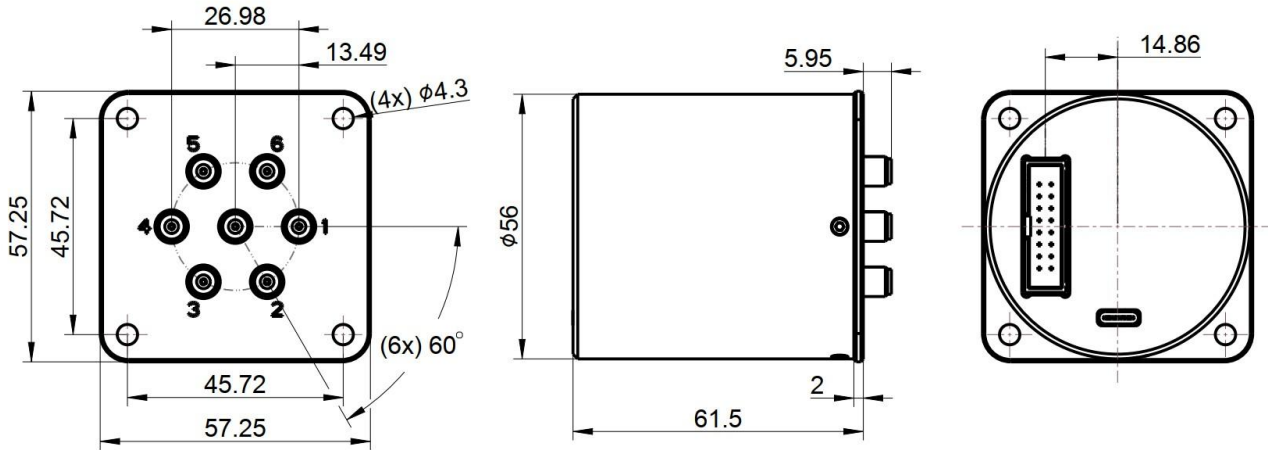

Dimensions in mm

Typical Tolerance $\pm 0.5\text{mm}$

Draft

Configuration

Connector Type	2.92 Female
Connector Outer Contact	Stainless steel (SUS303), Passivation
Connector Center Contact	Beryllium Copper, Gold
Switch Sequence	Break-Before-Make
Switching Speed	$\leq 15\text{ms}$
Control Interface	Type-C /JTAG 2*8P (2.54)

Electrical Characteristics

Impedance	50 Ω
Frequency Range	DC to 40GHz
Isolation	100dB Minimum DC-12GHz 80dB Minimum 12-15GHz 70dB Minimum 15-20GHz 65dB Minimum 20-40GHz
VSWR	1.3 Maximum DC-4GHz 1.35 Maximum 4-12.4GHz 1.5 Maximum 12.4-18GHz 1.7 Maximum 18-26.5GHz 1.9 Maximum 26.5GHz-40GHz
Insertion Loss	0.3dB+0.015x f(GHz), DC-26.5GHz 0.030x f(GHz)-0.1dB, 26.5GHz-40GHz
Supply Voltage	24VDC
Supply Current	200mA

Coaxial Switch Datasheet



Supply Current (Quiescent)	50mA
----------------------------	------

Mechanical Properties

Contacting Mating Cycle	500 times
Operating Life	5 million Cycles Measured In 25 °C


Environment Data

Working Temperature	-25℃ ~ +75℃
Storage Temperature	-55℃ ~ +85℃

Order Information

P/N	Description
SWH-1P4T-40-1NT	1P4T Coaxial Switch 2.92 Connector have Load TTL(5V), Common GND, DC-40GHz
SWH-1P4T-40-0NT	1P4T Coaxial Switch 2.92 Connector have Load Non-TTL, Common GND, DC-40GHz
SWH-1P6T-40-1NT	1P6T Coaxial Switch 2.92 Connector have Load TTL(5V), Common GND, DC-40GHz
SWH-1P6T-40-0NT	1P6T Coaxial Switch 2.92 Connector have Load Non-TTL, Common GND, DC-40GHz

Standard drive

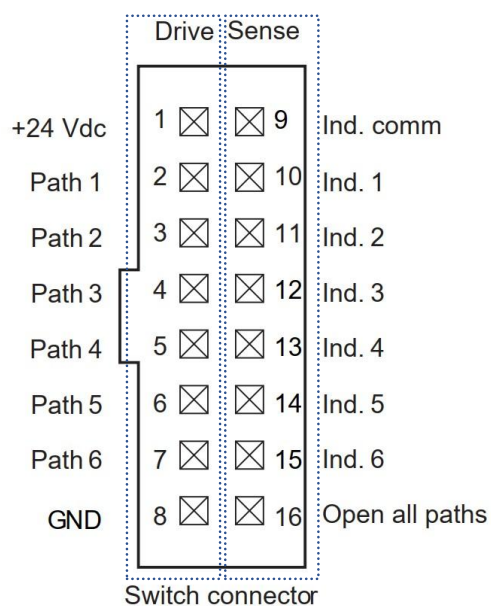

Draft

Notes:

- 1、Connect pin 1 to 24 VDC;
- 2、Connect pin 8 to GND;
- 3、Select (close) desired RF path by applying ground to the corresponding "drive" pin; for example, ground pin 2 to close RF path 1.


Coaxial Switch Datasheet

Draft

TTL Standard drive

	Drive	Sense	
+24 Vdc	1	9	Ind. comm
Path 1	2	10	Ind. 1
Path 2	3	11	Ind. 2
Path 3	4	12	Ind. 3
Path 4	5	13	Ind. 4
Path 5	6	14	Ind. 5
Path 6	7	15	Ind. 6
GND	8	16	Open all paths

Switch connector

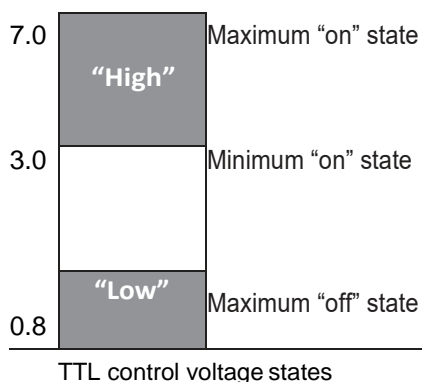

Instructions TTL drive:

- 1、Connect pin 1 to supply +24 VDC
- 2、Connect pin 8 to ground (Notes1).
- 3、Select (ON) desired RF path by applying TTL "High" to the corresponding "drive" pin; for example apply TTL "High" to pin 3 to ON RF path 2.
- 4、To select another path, ensure that all unwanted RF path "drive" pins are at TTL "Low" (to prevent multiple RF path engagement). Apply TTL "High" to the "drive" pin which corresponds to the desired RF path (see Note 3).
- 5、To open all RF paths, ensure that all RF path "drive" pins are at TTL "Low." Then, apply TTL "High" to pin 16.

Notes

1. Pin 8 must always be connected to ground to enable the electronic position-indicating circuitry and drive logic circuitry.

CAUTION: IF PIN 8 IS NOT CONNECTED TO POWER SUPPLY GROUND, CATASTROPHIC FAILURE WILL OCCUR.

2. After the RF path is switched and latched, the drive current is interrupted by the electronic position-sensing circuitry. Pulsed control is not necessary, but if implemented, the pulse width must be 15 ms minimum to ensure that the switch is fully latched.
3. The default operation of the switch is break-before-make. Make-before-break switching can be accomplished by simultaneously selecting the old RF path "drive" pin and the new RF path "drive" pin. This will simultaneously close the old RF path and the new RF path. Once the new RF path is closed (15 ms), deselect the old RF path "drive" pin while leaving the new RF path "drive" pin selected. The switch circuitry will automatically open the old RF path while leaving the new RF path engaged.